

Weigh Module

FEATURES

- Capacity range: 5, 10, 20, 50, and 100 kN (1.12K, 2.25K, 4.5K, 11.2K, and 22.5K lb)
- Easy installation
- Moveable load point
- Withstands very high lateral forces
- Extremely accurate and rugged
- ATEX and IECEx certified for hazardous locations

APPLICATIONS


- Silo, bin and hopper weighing
- Inventory control systems
- Industrial conveyors
- Force measurement systems

DESCRIPTION


The KIS-9 load cell has several features that clearly distinguish it from other load cells. It is easy to install and extremely accurate, even when subjected to vibration forces and severe environmental conditions. All KIS load cells can be ATEX and IECEx certified for use in explosive atmospheres.



OUTLINE DIMENSIONS

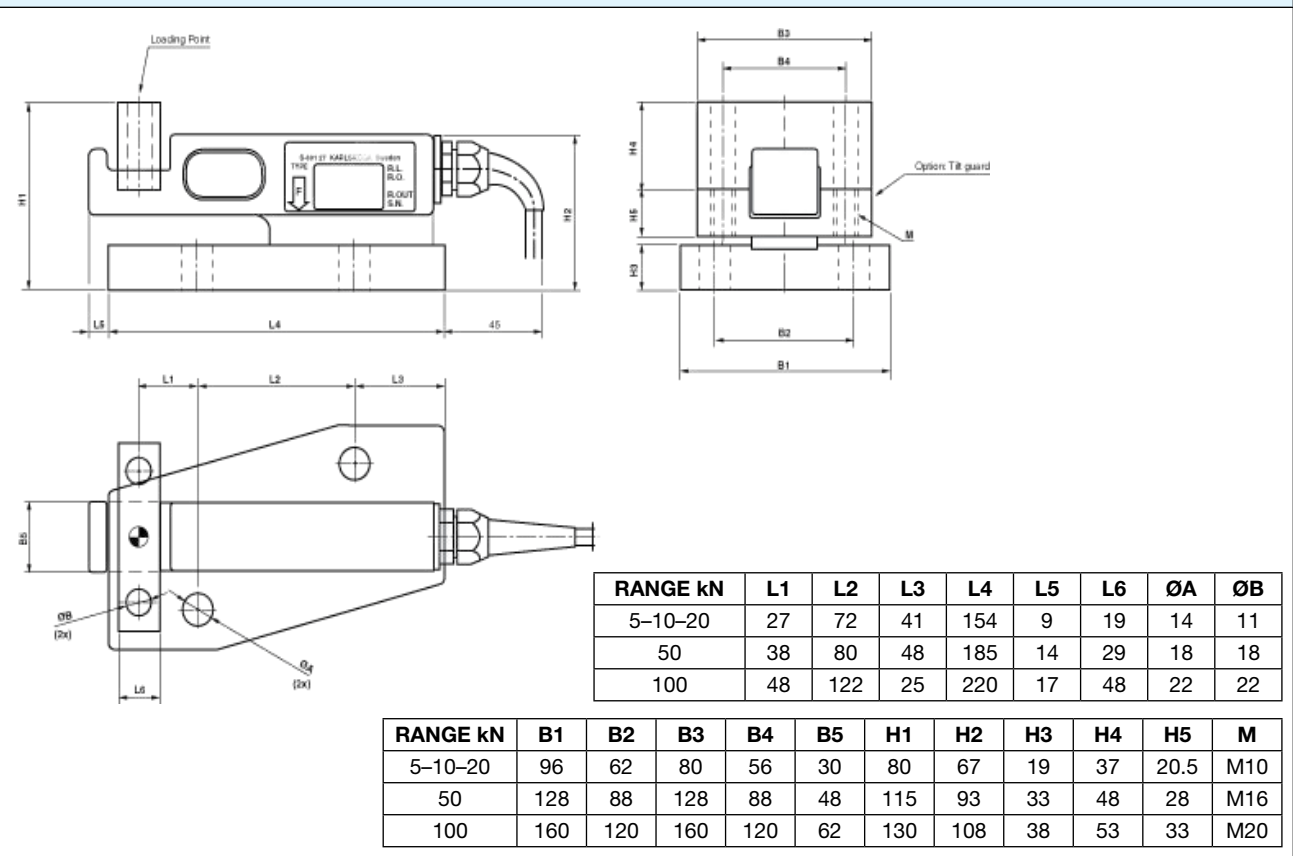

Weigh Module

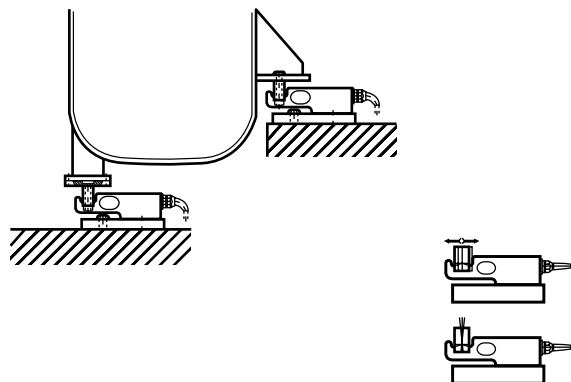INSTALLATION EXAMPLES

SPECIFICATIONS

PARAMETER	VALUE	PARAMETER	VALUE
Rated load (RL)	5, 10, 20, 50, 100 kN	Temperature range	-40 to +80°C (+100°C) ⁽³⁾
Combined error (terminal)	±0.1% RO	Temperature effect on output (-10°C to +50°C)	±0.003% of output/°C
Repeatability	0.02% RO	Temperature effect on zero balance (-10°C to +50°C)	±0.003% of RO/°C
Overload, safe	50% RL ⁽¹⁾	Insulation resistance at 200 VDC	>4 GΩ
Overload, ultimate	100% RL ⁽¹⁾	Material	Stainless steel
Sideload, ultimate	100% RL ⁽¹⁾	Electrical connection	5 m shielded four conductor cable 5, 10, and 20 kN
Input voltage, recommended	10 VDC or VAC		10 m shielded four conductor cable 50 and 100 kN
Input voltage, maximum	18 VDC or VAC	Degree of protection	IP67
Input resistance	350 Ω ±5 Ω	APPROVALS	
Output resistance	350 Ω ±1 Ω	ATEX, IECEx certified versions are available upon request. For details contact blhnobel@vpgsensors.com .	
Rated output (RO)	1.020 mV/V		
Tolerance of (RO)	±0.25% RO		
Zero balance	±2% RO		
Tolerance of shunt calibration values	±0.25 % of value ⁽²⁾		
Creep at R.L. after 30 minutes	±0.03% RL		

(1) Referring to recommended loading case

(2) See calibration sheet of the load cell

(3) -40 to +100°C on demand

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.