

## High Temperature Load Cell

### FEATURES

- Operational to 400°F
- Compact—rugged
- Low deflection
- Environmentally sealed
- 20,000 to 200,000 pound capacities

### APPLICATIONS

- High temperature environments

### DESCRIPTION


C2G1-H load cells operate at temperatures up to 400°F without needing external cooling. Ability to withstand extreme heat makes C2G1-H cells the perfect choice for weighing molten metals. Other applications include tank and scale installations in locations that are subject to intense heat.

Double diaphragm fabrication and gage linearizing combine to offer precision performance and long term reliability. Low deflection and superior sealing guarantee



trouble-free operation. Relatively low mass and small deflection under load, produce excellent frequency response. Overall, C2G1-H cells perform superbly in severe environments where other transducers cannot.

### OUTLINE DIMENSIONS

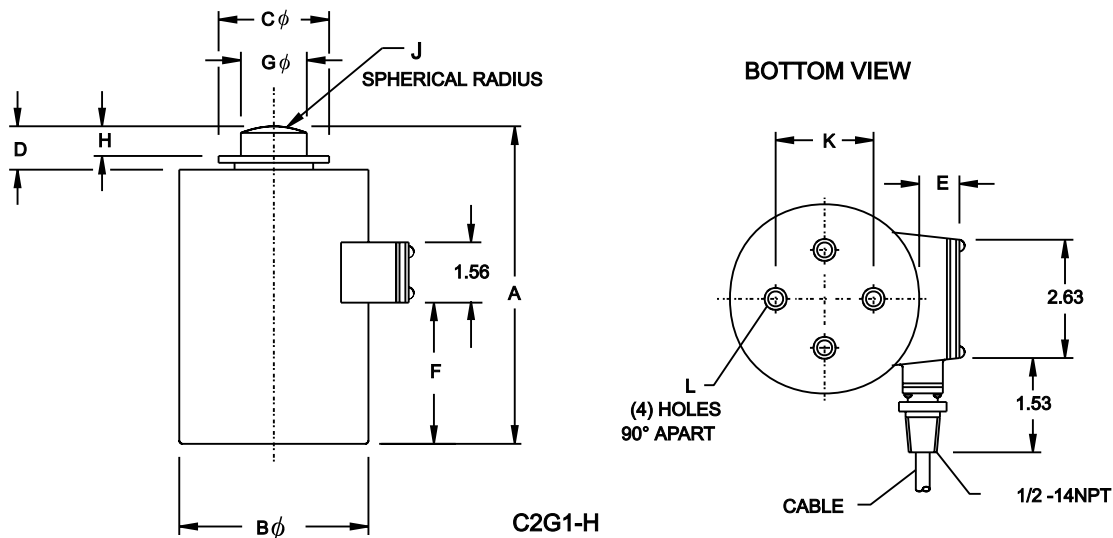

CAPACITY (lbs)	A	B $\phi$	C $\phi$	D	E	F	G $\phi$	H	J	K	L
20,000	7 1/2	4 1/2	2 1/4	3/4	7/8	3 7/16	1 1/4	1/2	6	2 3/8	3/8-24UNF-2B X 3/8 DP
50,000	7 1/2	4 1/2	2 1/4	3/4	7/8	3 7/16	1 1/4	1/2	6	2 3/8	3/8-24UNF-2B X 3/8 DP
100,000	9 1/8	6	3 1/8	1 1/16	1 1/32	4 3/4	1 3/4	5/8	12	4	1/2-20UNF-2B X 3/4 DP
200,000	11 5/8	8	4 1/2	1 1/16	1 1/8	6 1/4	2 1/2	5/8	12	5 1/2	5/8-18UNF-2B X 1 DP

## High Temperature Load Cell

SPECIFICATIONS		PARAMETER	VALUE
<b>PERFORMANCE</b>		<b>TEMPERATURE</b>	
Rated output	2 mV/V $\pm$ 0.25%	Safe range	$\pm$ 15 to $\pm$ 400°F
Non-linearity—% RO	0.20	Compensated range	$\pm$ 15 to $\pm$ 400°F
Hysteresis—% RO	0.10	Effect on zero balance	0.0025% RO/°F
Repeatability—% RO	0.10	Effect on rated output	0.005% Load/°F
Creep—% RO (20 minutes)	0.10	<b>ADVERSE LOAD RATINGS</b>	
<b>ELECTRICAL</b>		Safe overload	150% RO
Recommended excitation	10 VAC-DC	Ultimate overload	300% RO
Zero balance—% RO	2.5		
Input resistance	375 $\Omega$ $\pm$ 8 $\Omega$ @ 400°F		
Output resistance	350 $\Omega$ $\pm$ 10.0 $\Omega$		
Number of bridges	single		
<b>Min. Insulation resistance</b>			
Bridge to ground	1000 M $\Omega$ (@ 50 VDC)		
Shield to ground	1000 M $\Omega$ (@ 50 VDC)		
Electrical connection	20 ft cable		

BLH Nobel is continually seeking to improve product quality and performance. Specifications may change accordingly.