


Venus Transmitter

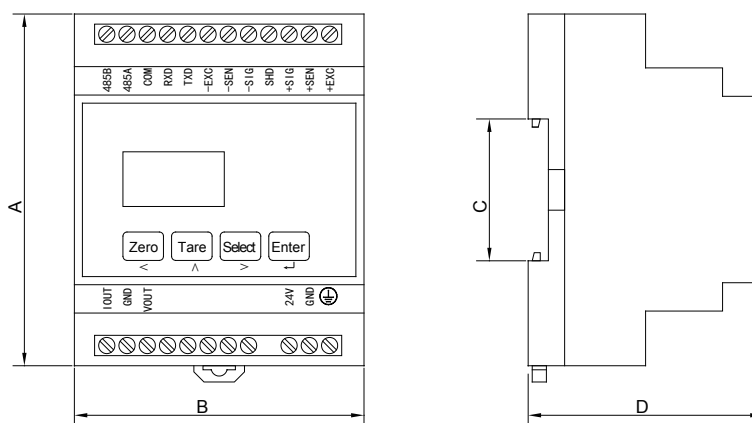

Specifications

Mounting:
ABS/DIN rail

Excitation For Load Cell:
5VDC

Serial Interfaces:
RS232 and RS485 Modbus RTU

Operation Temperature:
-10°C~+55°C

Storage Temperature:
-20°C~+70°C

Keyboard:
4-key

Min. Input Sensitivity:
0.6μV/d

IO(Optional):
2 IN / 4 OUT

Analogue Output (Optional):
4~20mA;0~20mA;0~24mA;
0~5V;0~10V

Display:
OLED

Number of Load Cells:
6x350Ω Load Cell (max)

AD Transformation Rate:
200Hz~3kHz

Power Supply:
+24VDC(±15%), < 3W

Dimensions(W*H*D):
86.8x57.9x71.5mm

Dimensions

Model	A	B	C	D
mm				
Venus	86.80	71.50	35.17	57.90

Order Information

MODEL	
Venus	Venus-DA
Venus-IO	

Interchangeable Products

MANUFACTURER	MODEL
METTLER TOLEDO	IND331 / IND320